

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000679

International filing date: 23 February 2005 (23.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0403969.9
Filing date: 24 February 2004 (24.02.2004)

Date of receipt at the International Bureau: 08 April 2005 (08.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB 2005 / 0 0 0 6 7 9



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

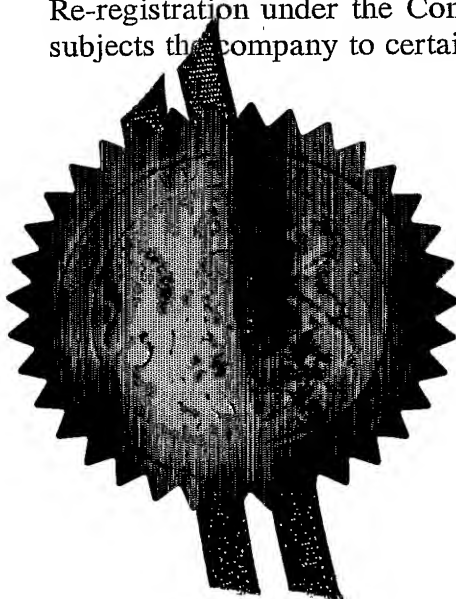


Signed *A. B. Jones*

Dated 23 March 2005



The
Patent
Office

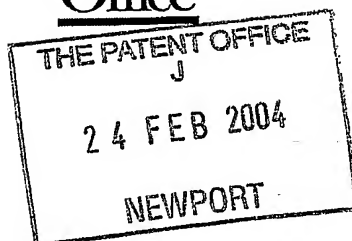

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference P3139 24FEB04 EB75501-1 003012
P01/7700 0.00-0403969.9 ACCOUNT CHA

2. Patent application number 24 FEB 2004 0403969.9
(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames) Huntleigh Technology PLC
310-312 Dallow Road
Luton
Bedfordshire
LU1 1TD

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation United Kingdom

506907001

4. Title of the invention Tissue Treatment Device

5. Name of your agent (if you have one) Shalini Thaker
Group IP Department
Huntleigh Technology PLC
310-312 Dallow Road
Luton
Bedfordshire
LU1 1TD

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

506907003

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d)) Yes

Patents Form 1/77

- Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form -

Description 6

Claim(s) 2

Abstract

Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) 1


Request for substantive examination (Patents Form 10/77) 1

Any other documents -
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date 23 February 2004

12. Name and daytime telephone number of person to contact in the United Kingdom

Tracey Hall (01582) 745812

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

Tissue Treatment Device

This invention relates to a wound healing device, in particular a device using a vacuum for accelerated wound
5 ealing.

With the ageing of the world's population the clinical and cost impact of several categories of soft tissue wounds is increasing including pressure ulcers, vascular ulcers and diabetic foot ulcers. Not only is it
10 required to accelerate healing of such wounds compared with conventional methods but also to succeed in healing the minority which are impossible to heal with conventional methods.

A solution to this problem not only reduces
15 suffering by patients but also the considerable cost of conventional wound care products and the associated healthcare labour.

It has been known since the 1980s that the application of a vacuum to a wound by its suction action,
20 provides an antiseptic effect, promotes wound clearing from bacteria, pus and necrotic masses and promotes quicker filling of the wound with granulation tissues, thereby providing a faster rate of healing.

Prior art vacuum systems comprise a cover to seal
25 the wound and apply a vacuum to act on the wound surface and porous packing material may be provided under the cover for the vacuum space.

The present invention aims to make improvements. Accordingly, the present invention provides a device for
30 treatment of a wound comprising a bladder to be placed over a wound, the bladder inflated to conform to the wound surface, sealing means to isolate the bladder and the wound surface from the atmosphere and vacuum means to apply a vacuum to the area between the bladder and the

wound. The bladder is inflated to take up the area within the wound cavity that is normally filled with a packing material such as sponge or similar. Such packing material has its problems of retaining wound exudate within it, becoming enmeshed with the tissue within the wound and tearing the tissue ingrained upon removal of the dressing. Advantageously, the inflated bladder has none of the problems of the existing systems and applies an even pressure against the wound cavity surface which is comfortable even when the body rests against the device.

In a preferred embodiment, the inflated bladder applies an alternating pressure against the wound cavity surface, to induce perfusion of the wound surface for quicker healing. Preferably, the bladder comprises a surface area of greater magnitude to that of a wound cavity within which it is to be used in order to provide folds of the bladder against the wound cavity surface when inflated. The folds provide areas between the bladder and the wound surface for suction. Preferably, the bladder comprises convolutions within its outer surface or more preferably, an uneven surface texture.

More preferably, the bladder is in the form of a bellows, the number used depending on the size of the wound cavity.

Moreover, the bladder comprises two layers, an inner layer and an outer layer, the outer layer being convoluted and having an inlet and a plurality of apertures to introduce media into the wound cavity. In this way, ozone or a similar bacterial growth inhibitor can be introduced to the wound cavity. Alternatively, oxygen could be introduced into the wound cavity for local oxygenation. Similarly, saline solution or liquid disinfectant could be introduced to the wound cavity to

inhibit infection. Preferably, the media introduced into the wound cavity is heated to provide normothermic wound surface heating. Alternatively, for a simpler construction, the bladder preferably is of gas permeable material, the fluid inflating the bladder, say for example ozone or oxygen, allowed to permeate into the wound cavity.

Preferably, the bladder is transparent or translucent to allow for visual inspection of the wound without the need for removal of the device. As an additional means of promoting the healing of the wound, the bladder includes light emitting means, for example laser or polychromatic light, to stimulate the wound cavity surface.

The invention will be now be further described by way of example, with reference to the accompanying drawings, in which:

Figure 1 shows a cross sectional view of one embodiment of a device according to the invention;

Figure 2 shows the device in Figure 1 where the inlets to the bladder and vacuum means are coaxially located;

Figure 3 shows another embodiment of a device providing heating; and

Figures 4 to 6 show alternative versions of the bladder for the device.

Referring to Figure 1, the device consists of a bladder 2, having inlet 1 connected to a fluid source (not shown). The bladder 2 can be of any suitable polymeric material, for example polyurethane, PVC or polyethylene and can also be impregnated with wound healing compounds to promote healing. The bladder 2 is inflated by means of inlet 1 and placed within a wound cavity to generally conform to the cavity shape. A one

way valve (not shown) at the inlet 1 maintains the bladder 2 in its inflated state. The bladder 2 can be inflated by any suitable means for example, a hand pump or a compressor. The bladder 2 can be inflated to provide
5 constant pressure against the wound surface or pulsed pressure, as required. A seal 3, which can be any adhesive film or flexible polymer sheet with adhesive applied to the surface facing the tissue seals the bladder 2 and the wound cavity from atmosphere. The seal
10 3 overlies the bladder 2 and extends beyond the wound area onto intact tissue. The seal 3 includes one or more inlets/outlets 4, 5 for connection to a vacuum source and/or for the supply of media to be introduced into the wound cavity. The vacuum source can be a vacuum pump or a
15 continuous vacuum provided in hospitals. The media to be introduced into the wound cavity can be saline, water or ozone, oxygen, or any substance promoting wound healing.

In one embodiment, the seal 3 is provided with one tube 4 connected to a vacuum source and supply of media
20 with suitable controls to operate the vacuum and supply as required. Alternatively, the seal 3 can be provided with a plurality of tubes 4, 5 to provide a vacuum 4 and supply of media 5 separately. These two in combination provide a controlled rate of flow of media across the
25 wound surface at a pressure substantially below atmospheric pressure with any wound exudate scavenged along to the vacuum exit tube 4. The tubes 4, 5 can be located coaxially or concentrically in one location on the seal 3 (see Figure 2) or located in any desired
30 position on the seal 3. The seal 3 can also be provided with a collar 19 to support the tubes 4, 5.

The bladder 2 can simply be evacuated and made smaller when it has to be removed from the wound cavity without causing any damage to the wound surface.

Furthermore, during healing of the wound, as the wound cavity shrinks so can the bladder by removal of the inflation fluid. Therefore there is no requirement for changing the wound healing device.

5 In another preferred embodiment, the bladder inlet and vacuum inlet are operated by the same pump, the pump inflating the bag insitu within the wound cavity and then switching over to apply a vacuum to the wound cavity.

10 As shown in Figure 3, the bladder 2 is provided with an inlet 1 and an outlet 7 connected to a compressor 8 and heater 9. Thus, the bladder 2 is inflated with heated air to provide heating to the wound surface, the heating promoting perfusion of the area. The air can be replaced by water to provide the same effect.

15 The bladder 2 can be of transparent or translucent material to allow visual inspection of the wound surface without having to remove the seal. The translucent bladder 2 can also be provided with optical fibres to provide light to the wound surface to stimulate healing.
20 These optical fibres can run co-axially down the inlet 1 tube and terminate at entry to the bladder 2, permitting illumination of the wound cavity. In another embodiment, the walls of the inlet 1 tube itself may act as a light conduit from a light source in the fluid pump, and light
25 evenly dispersed around the wound cavity by the bladder 2 material acting as a diffuser. This is an improvement over current phototherapy treatment methods, where illumination is only possible during change of dressing. With the method described above, illumination can occur
30 continuously if necessary, either at 100% power level or pulsated, and at different wavelengths, under the control of a computer system inside the fluid pump.

Similarly, the wound surface can be subjected to magnetic pulse therapy by using intermittent alternating

voltage applied as a coil. Typically, a coil is placed within a sealed cover and manipulated so that the coil axis is at 90° to the wound surface, when energised the coil ensures that the wound surface is placed at an
5 alternating magnetic field of sufficient intensity to promote wound healing.

The bladder 2 can also be impregnated with interdigitated electrodes for direct electrical wound surface stimulation, known to promote healing, or the
10 bladder can be of a conductive material connected electrically.

The wound healing device of the present invention can be used on a range of wounds, the bladders taking any shapes and sizes to accommodate differing wound cavities
15 from shallow to irregular and deep wounds. Figures 4 to 6 show some variations of the bladder configurations but any size or shape is possible. Figure 4 shows the bladder 2 within a shallow wound cavity. Figure 5 shows the bladder as a series of bellows, the number depending upon
20 the wound size. Figure 6 shows the bladder having an inner layer and an outer layer.

CLAIMS

1. A device for treatment of a wound comprises a bladder to be placed over a wound, the bladder inflated
5 to conform to the wound surface and maintained in the inflated state, sealing means to isolate the bladder and the wound surface from the atmosphere and vacuum means to apply a vacuum to the area between the bladder and the wound.
- 10 2. A device as claimed in claim 1 wherein the bladder surface has folds resting against the wound cavity surface, when inflated.
- 15 3. A device as claimed in claims 1 or 2 wherein the bladder outer surface comprises convolutions.
4. A device as claimed in claims 1, 2 or 3 wherein the bladder outer surface has an uneven texture.
- 20 5. A device as claimed in claim 1 wherein the bladder is in the form of a bellows.
6. A device as claimed in claims 1, 3 or 4 wherein the
25 bladder comprises two layers, an inner layer and an outer layer, the outer layer having an inlet and a plurality of apertures to introduce media into the wound cavity.
7. A device as claimed in claim 6 wherein the media
30 introduced into the wound cavity is heated to provide normothermic wound surface heating.
8. A device as claimed in claims 1 to 5 wherein the
35 bladder is of gas permeable material, the fluid inflating the bladder allowed to permeate into the wound cavity.

9. A device as claimed in any preceding claim wherein the bladder is transparent to allow for visual inspection of the wound.

5 10. A device as claimed in claim 9 wherein the bladder includes light emitting means to stimulate the wound surface.

11. A device as claimed in any preceding claim wherein
10 the bladder is inflated by alternating pressure.

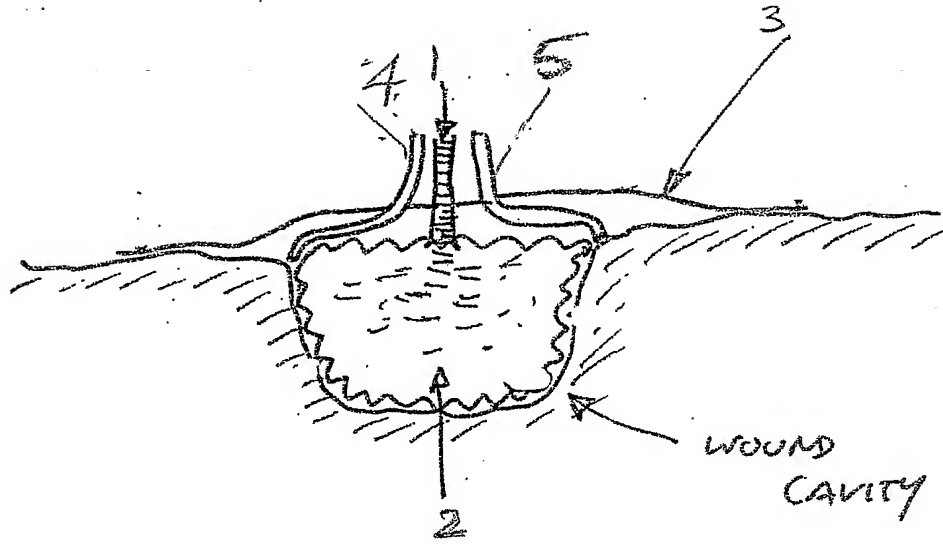


Figure 1

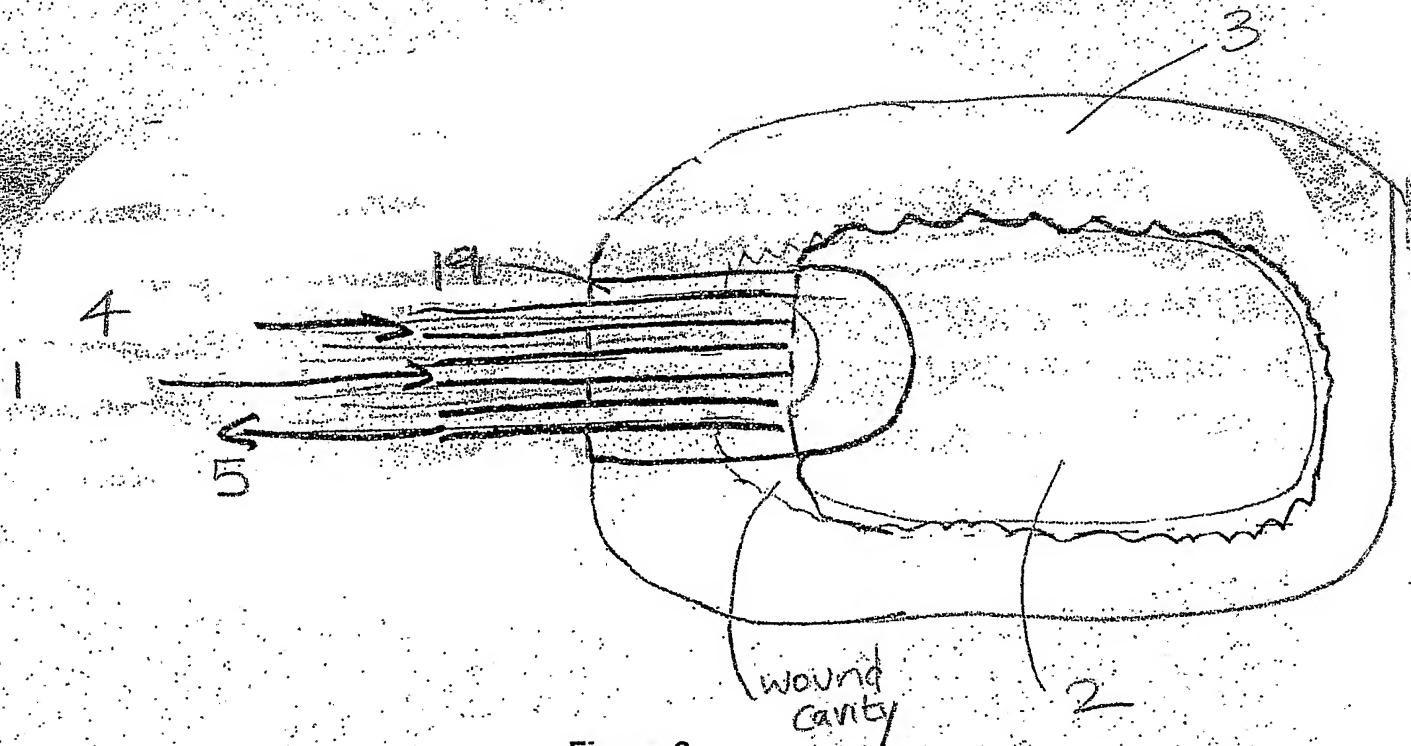


Figure 2



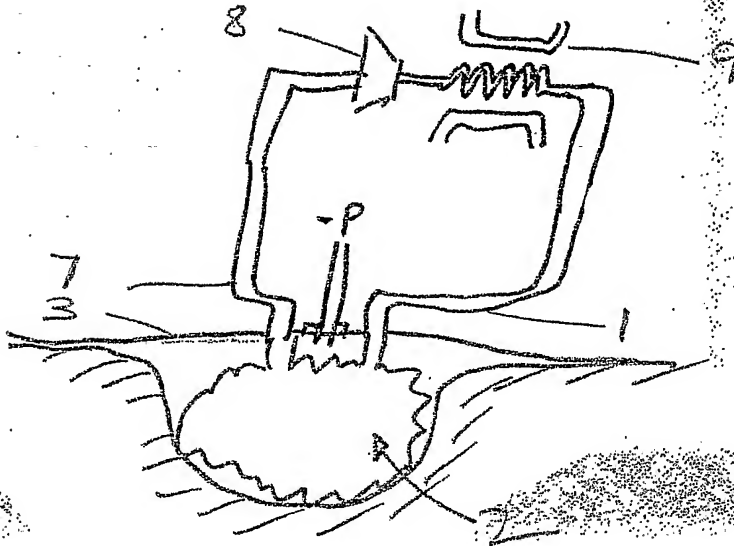


Figure 3

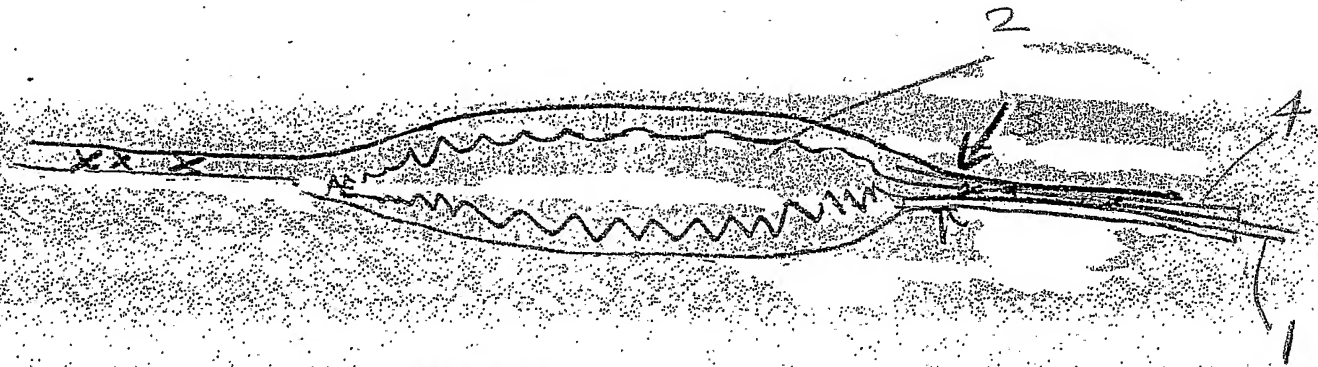


Figure 4

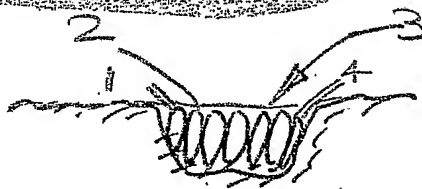


Figure 5

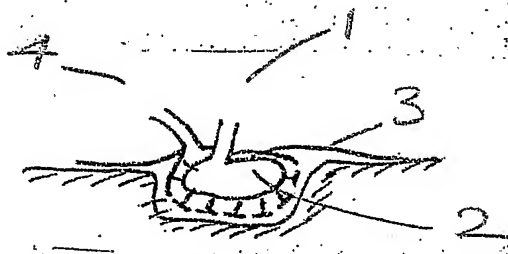


Figure 6

